

PROFILO

THE CLASSIC PROFILE SPOT

PROFILO is a professional light beam shaper ideal for use in theatres and other applications like trades fairs, conferences, etc.



ACCESSORIES INCLUDED

- 1 x Filterframe Black finishing - already mounted on the unit (code 02M00421.46)
- 4 x Shutter blades (code 02TP0007)

ACCESSORIES ON REQUEST

- Gobo Holder Type B (code 03.TA202)
- Iris/Diaphragm (code 03.TA201)
- G60 "C" Clamp max 50 kg (code 0521A004)
- G50 "C" Clamp max 10 kg (code 0521A012)
- Floor Stand max 10 kg (code 0521A013)
- Safety steel cable 0,3x60 cm - max capacity load 60 Kg (code 0521A010)

ONLY FOR PROFILO 1000

- Lamp 1000W GX9,5 CP70 (code 0505A042)

ONLY FOR PROFILO 500

- Lamp 500W GY9,5 CP82 (code 0505A006)
- Lamp 500W GY9,5 T25 (code 0505A033)



PROFILO 1000 Z 18° - 36° / 20° - 50°
BOX SIZE (LxHxD) 80 x 35 x 35 cm
WEIGHT 16 Kg
PACKAGING Carton box
 31.5" x 13.8" x 13.8" 35.3 lbs

PROFILO 500 Z 20°-40°
BOX SIZE (LxHxD) 50 x 26 x 30 cm
WEIGHT 8 Kg
PACKAGING Carton box
 19.7" x 10.2" x 11.8" 17.6 lbs

PROFILO 1000 Z 18°-36°
03.TP001

PROFILO 1000 Z 20°-50°
03.TP008

PROFILO 500 Z 20°-40°
03.TP002

INDEX

WEB PAGE

PROFILO 1000

OPTICAL GROUP

- 2 Zoom ranges available: 18° ÷ 36° / 20° ÷ 50°
- High definition zoom lens with double optical condenser lens

LAMP HOLDER

GX9.5

GOBOS

- Gobo size: 86mm (external), 60mm (image)
- Gobo holder type B for image projection (optional)

IRIS

- Iris / diaphragm (optional)

POWER SUPPLY

- Range 220-240Vac 50-60 Hz

SAFETY

- Safety micro switches
- Frontal protection grille (removable)

OPERATING TEMPERATURE

-10° / 40°

PHYSICAL


IP20

- Internal rotating system with four removable shutters
- Steel housing with aluminum edge profiles
- Removable cover for easy access to lamp

- Reversible yoke

- Weight: 14.8 kg (32.6 lbs)

- Finishing: Black

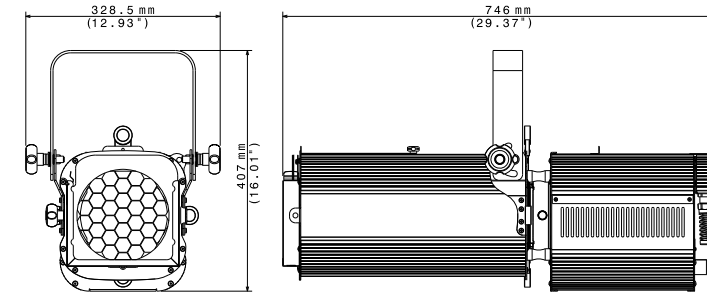

PHOTOMETRIC DATA

| | PROFILO 1000 | mt 5 ft 16.40 | mt 10 ft 32.81 | mt 15 ft 49.21 | mt 20 ft 65.62 | mt 25 ft 82.02 |
|-----------------------|--------------|------------------|-------------------|-------------------|-------------------|-------------------|
| BEAM ANGLE 18° | | | | | | |
| lux center (lx) | 2400 | 600 | 267 | 50 | 96 | |
| foot candles (fc) | 223 | 56 | 25 | 14 | 9 | |
| diameter (cm) | 158 | 317 | 475 | 634 | 792 | |
| diameter (ft) | 5.20 | 10.39 | 15.59 | 20.79 | 25.98 | |
| BEAM ANGLE 36° | | | | | | |
| lux center (lx) | 760 | 190 | 84 | 48 | 30 | |
| foot candles (fc) | 71 | 18 | 8 | 4 | 3 | |
| diameter (cm) | 325 | 650 | 975 | 1300 | 1625 | |
| diameter (ft) | 10.66 | 21.32 | 31.98 | 42.64 | 53.30 | |

PROFILO 500

OPTICAL GROUP

- Zoom: 20° ÷ 40°
- High definition zoom lens with double optical condenser lens

LAMP HOLDER

GY9.5

GOBOS

- Gobo size: 86mm (external), 48mm (image)
- Gobo holder type B for image projection (optional)

IRIS

- Iris / diaphragm (optional)

POWER SUPPLY

- Range 220-240Vac 50-60 Hz

SAFETY

- Safety micro switches
- Frontal protection grille (removable)

OPERATING TEMPERATURE

-10° / 40°

PHYSICAL


IP20

- Internal rotating system with four removable shutters
- Steel housing with aluminum edge profiles
- Removable cover for easy access to lamp

- Reversible yoke

- Weight: 7 kg (15.4 lbs)

- Finishing: Black

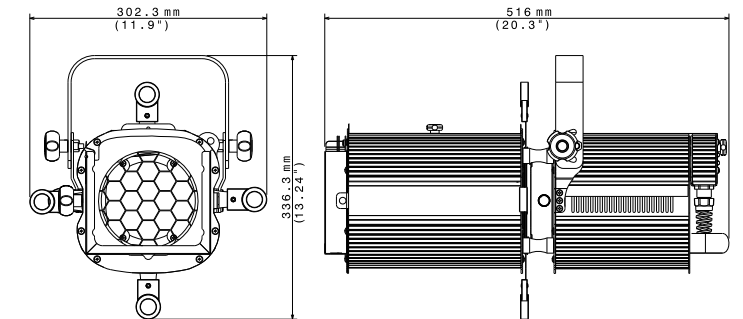

PHOTOMETRIC DATA

| | PROFILO 500 | mt 5 ft 16.40 | mt 10 ft 32.81 | mt 15 ft 49.21 | mt 20 ft 65.62 | mt 25 ft 82.02 |
|-----------------------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|
| BEAM ANGLE 20° | | | | | | |
| lux center (lx) | 950 | 238 | 106 | 59 | 38 | |
| foot candles (fc) | 88 | 22 | 10 | 6 | 4 | |
| diameter (cm) | 176 | 353 | 529 | 705 | 882 | |
| diameter (ft) | 5.78 | 11.57 | 17.35 | 23.14 | 28.92 | |
| BEAM ANGLE 40° | | | | | | |
| lux center (lx) | 300 | 75 | 33 | 19 | 12 | |
| foot candles (fc) | 28 | 7 | 3 | 2 | 1 | |
| diameter (cm) | 374 | 748 | 1122 | 1496 | 1869 | |
| diameter (ft) | 12.27 | 24.53 | 36.80 | 49.07 | 61.33 | |