


# PRX908

Professional Powered Two-Way 8-Inch PA Loudspeaker

JBL

PROFESSIONAL  
by HARMAN

## SPEC SHEET

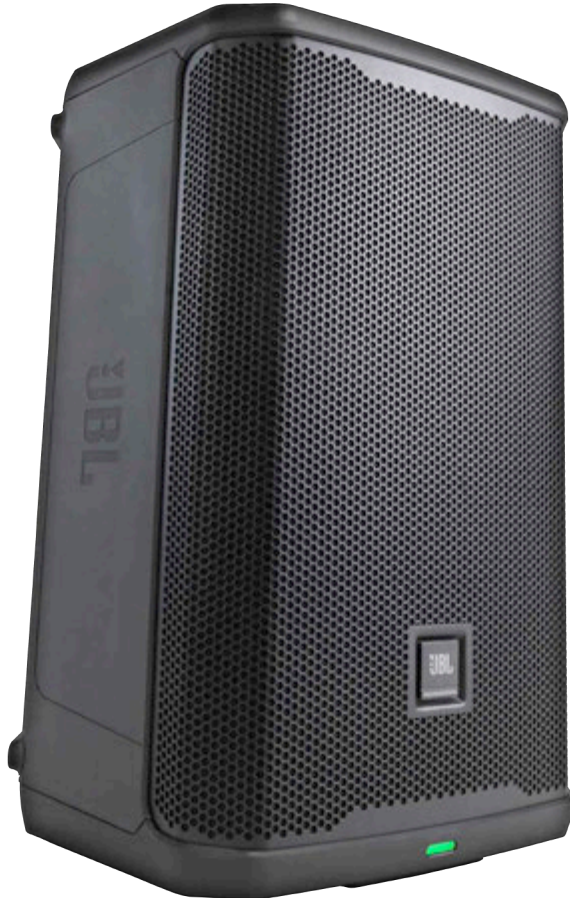

## OVERVIEW

The **JBL PRX908**, part of the PRX900 Series of powered loudspeakers and subwoofers, takes professional portable PA performance to a new level with advanced acoustics, comprehensive DSP, unrivaled power performance and durability, and complete BLE control via the JBL Pro Connect app.



REAR PANEL CONNECTIONS

## PRODUCT HIGHLIGHTS

- **Transducers:**
  - 908G 8" ferrite magnet woofer
  - JBL 2408H-2 1.5" poly-annular diaphragm compression driver
- **Updated JBL image control waveguide** improves dispersion
- **Low-noise, low-distortion gain staging design**
- Lightweight, efficient **Class D amplification**
- **Power:** 2,000 watts peak/1,000 watts RMS
- **Frequency response:** 55 Hz–20 kHz @4π (-10 dB); 65 Hz–20 kHz@4π (-3 dB)
- **Dispersion:** 105° x 60°
- **Max SPL:** 126 dB
- **Crossover frequency:** 1,930 Hz
- **Color LCD screen** provides access to mixing and DSP
- **DriveRack Technology** includes Automatic Feedback Suppression, system limiter and 180ms of speaker delay in 100-microsecond intervals for time-aligned systems
- **Optimized presets** for pairing full-range speakers and subwoofers
- **Quiet fanless operation**
- **JBL Pro Connect app** allows full system control of up to 10 speakers and line integration with JBL EON ONE MK2, PRX ONE and EON700 systems
- **G-Sensor Automatic Position Detect** optimizes tuning based on main or monitor orientation
- **Polypropylene/talc composite cabinet** is optimized for rigidity and durability
- **I/Os:**
  - 2 XLR balanced Combo jacks
  - 1 3.5mm aux
  - 2 XLR-M loop-through
  - 1 XLR-M mix out
- **Integrated handle** (top)
- **Suspension/mounting:** dual 36mm pole socket, six M10 suspension points
- **Ultra-low system latency:** <1 ms
- **Net weight:** 13.7 kg (30.2 lbs); **Gross weight:** 16.5 kg (36.4 lbs)
- **Dimensions:** 479 x 312 x 285 mm (18.9 x 12.3 x 11.2 in)
- Backed by **industry-leading seven-year warranty**

# PRX908

## Professional Powered Two-Way 8-Inch PA Loudspeaker



### SPEC SHEET

#### SPECIFICATIONS

<b>System Type</b>	8-Inch Powered Loudspeaker
<b>Woofers Model</b>	908G
<b>Woofers Size</b>	8"
<b>Woofers Magnet</b>	Ferrite
<b>Woofers Voice Coil</b>	2.4"
<b>Tweeter Model</b>	2408H-2
<b>Tweeter Size</b>	1.5"
<b>Tweeter Magnet</b>	Neodymium
<b>Transducer Impedance</b>	<b>Rated:</b> Woofer: 4 $\Omega$ Tweeter: 8 $\Omega$
<b>Max SPL</b>	126dB
<b>Freq Range -10</b>	55 Hz - 20 kHz (4 $\pi$ )
<b>Freq Range -3</b>	65 Hz - 15 kHz (4 $\pi$ )
<b>Hor Dispersion</b>	105°
<b>Vert Dispersion</b>	60°
<b>Power Rating</b>	2000W peak / 1000W RMS
<b>AC Power Input</b>	100 - 230 Vrms 50 - 60 Hz

<b>Cooling</b>	Natural Convection No Fan
<b>LED Indicators</b>	x3 SSM Input Levels and Limit
<b>Input Impedance</b>	100K $\Omega$ Balanced
<b>Input Gain</b>	0 - 36dB gain
<b>Crossover Freq</b>	1930Hz
<b>I/O</b>	x2 Combo Inputs and x1 3.5 mm Stereo Jack x2 XLR Through Out and x1 Mix Out
<b>Cabinet</b>	PP + 10% Talc
<b>Grille</b>	Powder Coated Steel, T=1.2mm
<b>Suspension/ Mount</b>	6x M10 Suspension Point and Pole Mount
<b>Handles</b>	Top Handle
<b>Net Weight</b>	13.7 kg (30.2 lbs)
<b>Gross Weight</b>	16.5kg (26.4 lbs)
<b>Product Dims</b>	<b>H x W x D</b> 479 x 312 x 285 mm (18.9 x 12.3 x 11.2 in)
<b>Shipping Dims</b>	<b>H x W x D</b> 515 x 424 x 397 mm (20.28 x 16.7 x 15.6 in)

#### PRODUCT FEATURES

##### All-New Acoustic Designs

From cones to cabinets, the PRX908 has been built from the ground up to leverage the latest JBL acoustic innovations. A patented JBL 2408H-2 1.5" compression driver with poly-annular diaphragm and neodymium magnet provides clear, detailed high-frequency response even at maximum volume. High-quality NTC thermistors protect transducers by reducing power sent to transducers when approaching thermal limit. Innovative new horns with updated JBL Image Control Waveguides provide optimum beamwidth and directivity. A next-generation woofer with ferrite magnet delivers smooth, natural bass and mids.

##### Power That Performs for You

PRX900 systems effortlessly support large performance spaces with high power and performance needs. Driven by a highly efficient 2,000W (peak) Class D power amp, PRX908 provides acoustic clarity and definition with minimal power compression, even at maximum volume. A bridged woofer amp keeps current spikes out of the ground and lowers crosstalk harmonics to the compression driver, and a power factor correction (PFC) power supply stabilizes voltage load sent to the amplifier. High-quality, high-linearity inductors deliver high power efficiency and low total harmonic distortion, and low-noise, low-distortion input gain staging optimizes range and headroom for a diverse gain requirements. A high-quality DAC and ADC provide near-lossless audio conversion. And with a full-bandwidth CMRR (Common Mode Rejection Ratio) greater than 55 dB and THD (total harmonic distortion) rating of <32 dB, system noise is virtually nonexistent.

##### Dial In Your Sound With Class-Leading DSP

PRX908 is fully loaded with comprehensive DSP, all accessible via the JBL Pro Connect app and onboard full-color LCD. Processing

includes 12-band parametric EQ and optimized system presets. Onboard dbx DriveRack technology features live and fixed Automatic Feedback Suppression, soft system limiters and 180ms of speaker delay in 100-microsecond intervals for precise time-aligned systems.

##### Versatile and Scalable

Combine PRX900 Series loudspeakers and subwoofers in a range of configurations to meet the needs of both mobile scenarios and fixed installs. PRX908 features dual 36mm pole sockets and six M10 suspension points. A built-in gyrosensor automatically optimizes tuning depending on monitor or mains placement.

##### Part of the Pro Connect Ecosystem

JBL's Pro Connect app offers BLE functionality for system control of up to 10 speakers and line integration with JBL EON ONE MK2, PRX ONE, and EON700 loudspeakers. The app provides full access to the PRX900 Series' DSP package, and users can easily mute channels and speakers with the touch of a button and can change speaker names and flash all unit LEDs for ease of speaker identification. App-exclusive features include speaker snapshots and groupings.

##### Rugged and Road-Worthy

PRX908 components are housed in a strong, lightweight enclosure that maximizes both acoustic performance and durability. Its cabinet is constructed from a polypropylene/talcum blend that's optimized for rigidity, with a computer-modeled internal ribbing design for maximum structural integrity and minimum cabinet noise.

##### In It for the Long Haul

Like every JBL product, the PRX908 undergoes an industry-leading 100-hour stress test of all components to ensure systems perform beyond expectations in real-world scenarios. It's so reliable that it's backed with an unprecedented seven-year warranty.

# PRX908

Professional Powered Two-Way 8-Inch PA Loudspeaker



## SPEC SHEET

### PRODUCT DIMENSIONS ■



HARMAN Professional 8500 Balboa Blvd. Northridge, CA 91329 USA

© 2022 HARMAN International Industries, Incorporated. All rights reserved.  
Features, specifications and appearance are subject to change without notice.

[www.jblpro.com](http://www.jblpro.com)

Issued: 9/2022